



**STATE OF HAWAII  
OFFICE OF HAWAIIAN AFFAIRS  
560 NORTH NIMITZ HIGHWAY, SUITE 200  
HONOLULU, HAWAII 96817**

February 28, 2019

**REQUEST FOR QUOTE LPM 2019-23  
INSTALLATION OF GRAVELED ENTRY AND GRAVELED AREA AT WAHIAWĀ  
PROPERTY**

**ADDENDUM No. 01**

**AMENDMENTS TO ORIGINAL REQUEST FOR QUOTE**

- 1) The information regarding the submission of quotes on page 1 of the RFQ LPM 2019-23 reads:

Quotes shall be received through the HIePRO website by 2:00 p.m. HST on Friday, March 1, 2019. All quotes received must include the Exhibit 1: Offer Form.

**The information regarding the submission of quotes on page 1 of the RFQ LPM 2019-23 is hereby amended to read as follows:**

Quotes shall be received through the HIePRO website by 2:00 p.m. HST on Friday, March 15, 2019. All quotes received must include the Exhibit 1: Offer Form.


- 2) Item 1 and 2 on page 2 under the Scope of Work of the RFQ LPM 2019-23 reads:

1. The Successful Vendor shall provide a price quote for a proposed course of action to lay a geotextile road clothe and install a graveled entry with 6" minus surge rock or a similar material, as shown on Exhibit 4. See Exhibit 4: Project Site Entry and Area to be Graveled.
2. The Successful Vendor shall also provide a price quote to lay a geotextile road clothe and gravel using crusher ready asphalt, comingled unprocessed asphalt, or a similar material for a 0.5-acre area and a 1-acre area. The vendor shall provide an itemized cost break down of all parts of this project.

**Item 1 and 2 on page 2 under the Scope of Work of the RFQ LPM 2019-23 is hereby amended to read as follows:**

1. The Successful Vendor shall provide a price quote for a proposed course of action to lay a geotextile road cloth, Mirafi RS380i, and install a graveled entry of 1,200 square feet with an 8 inch layer of 6 inch minus surge rock. See Updated Exhibit 4: Project Site Entry and Area to be Graveled.
2. The Successful Vendor shall also provide a price quote to lay a geotextile road cloth, Mirafi RS380i, grade 8 inch deep and grub area, with compaction of the area of 95 percent of the standard proctor, and gravel using an 8 inch layer of #1 angular gravel or #3 stones for a 2,800 square feet lot. The vendor shall provide an itemized cost break down of all parts of this project.

**Updated Exhibit 4: Project Site Entry and Area to be Graveled**

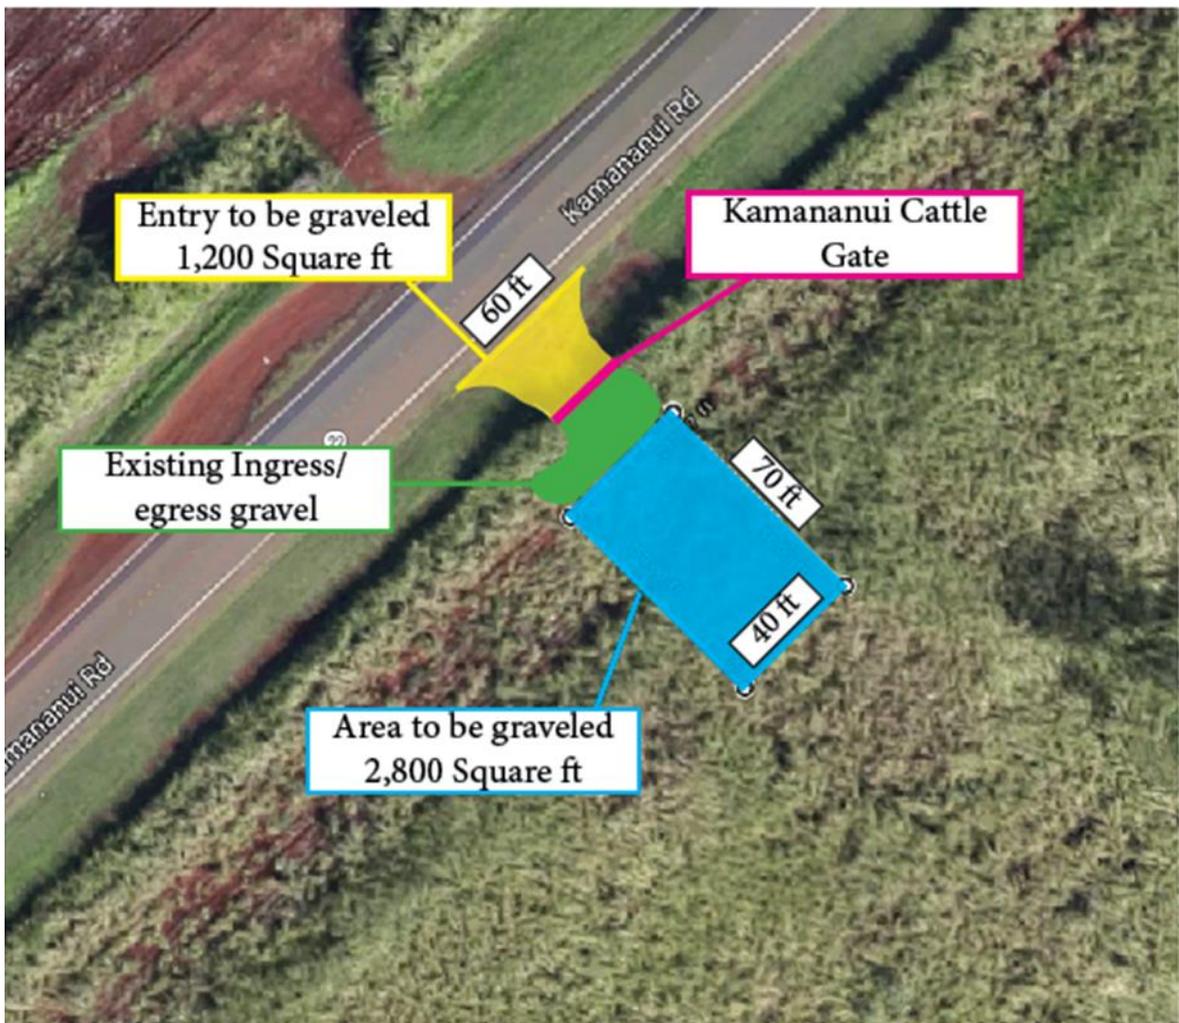

## **QUESTIONS & ANSWERS**

- 1) Do you need the vendor to grub and grade the area?

**Yes, the vendor shall grub and grade the area. The scope of work has been revised.**

- 2) Does this project require a NPDES permit?

**No, our revised scope of work will not require the permit since it does not exceed 1 acre. We are requesting for a graveled entry of 1,200 square feet, gravelling of 2,800 square feet, and have accounted for the areas for grading and grubbing.**

- 3) Can you specify on the geotextile material?

**We are requesting for Mirafi RS380i.**

- 4) Do you need warranty?

**No.**